


PLOW SHIFT LEVER starts and stops the vibrator.



**TRENCH CLEANER  
SHOE**



**PLOW LIFT**

PLOW LIFT or TRENCH CLEANER CONTROL raises and lowers plow or trench cleaner. Pull control to raise plow or trench cleaner. Push control to lower plow or trench cleaner.



**TRENCH CLEANER  
SLIDE**




**BLADE STEER**

BLADE STEER or TRENCH CLEANER SLIDE CONTROL steers plow blade left and right or lengthens and shortens trench cleaner slide. Pull control to steer plow left or shorten slide. Push lever to steer plow right or lengthen slide.

SEAT BELT needs to be fastened and adjusted before operation. Adjust seat belt by pulling on loose end of strap under the right buckle. Seat belt should be snug but not tight. Unfasten seat belt by lifting up on right buckle. Both ends of seat belt will retract when unfastened.

## SPECIFICATIONS:

### A615

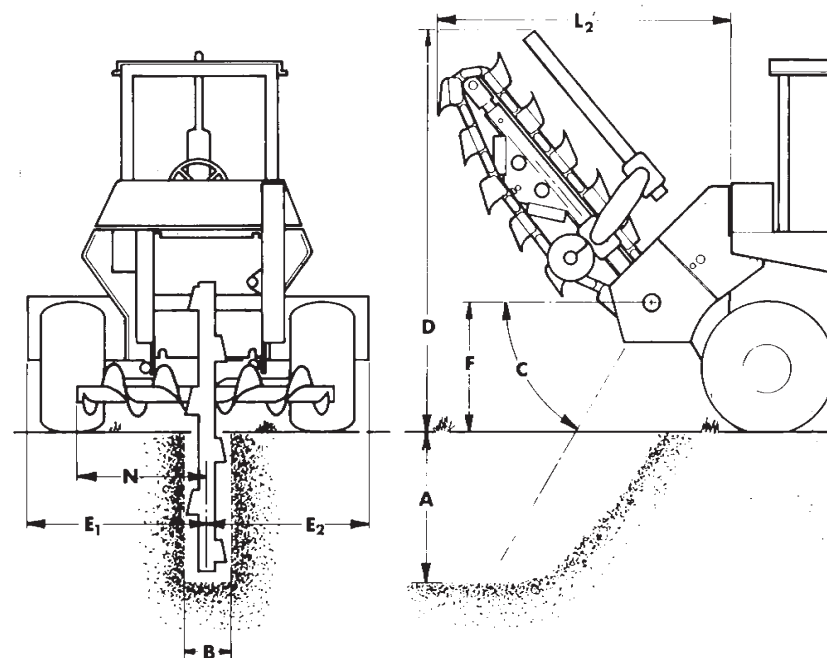

#### DIMENSIONAL:

#### U.S.

#### METRIC

|                  |                                              |         |            |
|------------------|----------------------------------------------|---------|------------|
| A.               | *Trench depth, max.**                        | 99 in   | 2616 mm    |
| B.               | *Trench width—standard chain                 | 6-24 in | 152-610 mm |
|                  | Weld-on alligator chain attachment           | 6 in    | 152 mm     |
|                  | Bolt-on alligator chain attachment           | 6.75 in | 171 mm     |
|                  | Boom travel up                               | 35°     | 35°        |
| C.               | Boom travel down                             | 60°     | 60°        |
| D.               | Height—transport                             | 116 in  | 2946 mm    |
|                  | Head shaft overhang                          | 31.5 in | 800 mm     |
|                  | Angle of departure                           | 26°     | 26°        |
| E <sup>1</sup> . | Centerline trench to outside edge of machine | 38 in   | 965 mm     |
| E <sup>2</sup> . | Centerline trench to outside edge of machine | 34 in   | 864 mm     |
| F.               | Head shaft height—digging chain              | 31 in   | 787 mm     |
| L <sup>2</sup> . | Length—transport                             | 139 in  | 3530 mm    |
| N.               | Spoil discharge reach                        | 31.5 in | 800 mm     |

\*Refer to chart for recommended depth/width combinations.

\*\*Based on longest boom, 3.067 pitch chain, 31 x 15.50-15, 8-ply tires.